



Specifications

Nominal Capacity	2600mAh
Minimum Capacity	2550mAh
Nominal Voltage	1.2V
Max. Charge Voltage	1.6V
Standard Charge	Fully charged in 16 hours at 260mA
Fast Charge	1300mA×140min (-ΔV= 5mV/pcs)
Charge Retention	80% of nominal capacity after cell storage at 20°C for 12 months when discharged at 520mA to 1.0V at 20°C
Internal Resistance	≤35mΩ
Cycle Life	300+
Terminals	Button Top
Ambient Temperature Range	Standard Charge: 0~40°C Fast Charge: 10~35°C Discharge: -10~65°C Storage: -20 to 35°C
Net Weight	30g

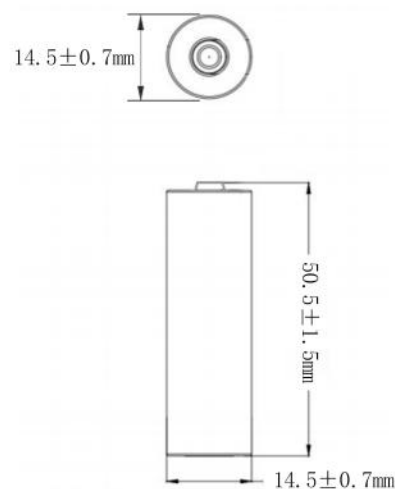


Charging Diagram

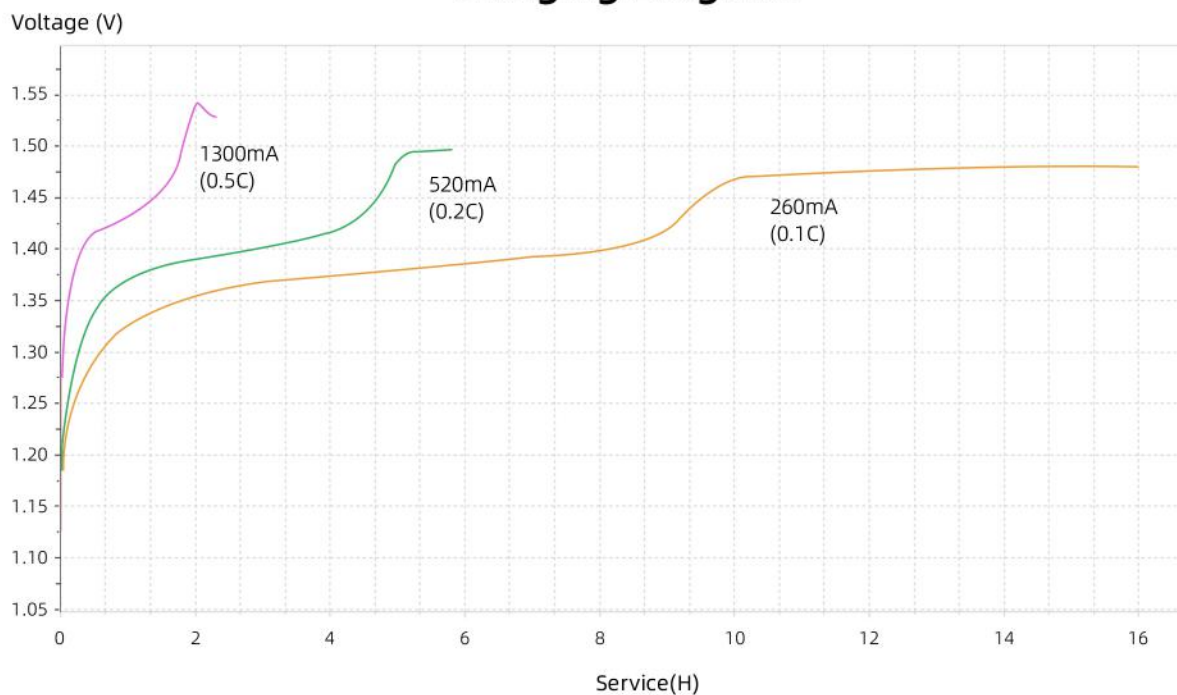


Discharge Characteristics

Typical Performance at 20±5°C

Voltage (V)

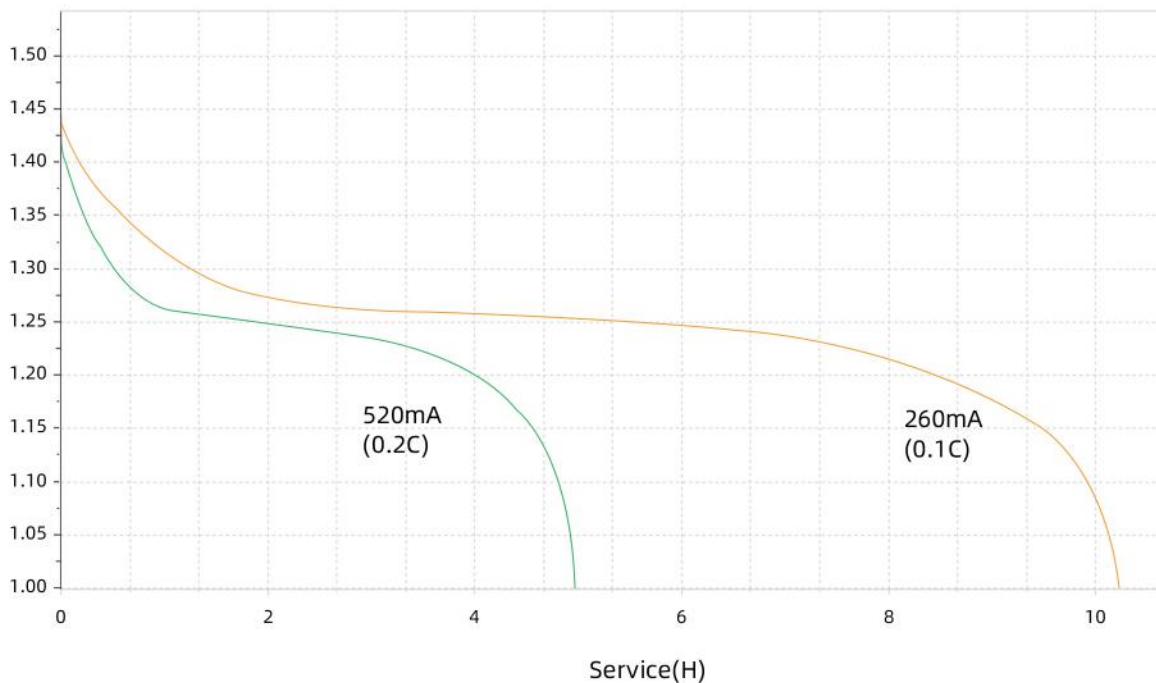

Voltage (V)

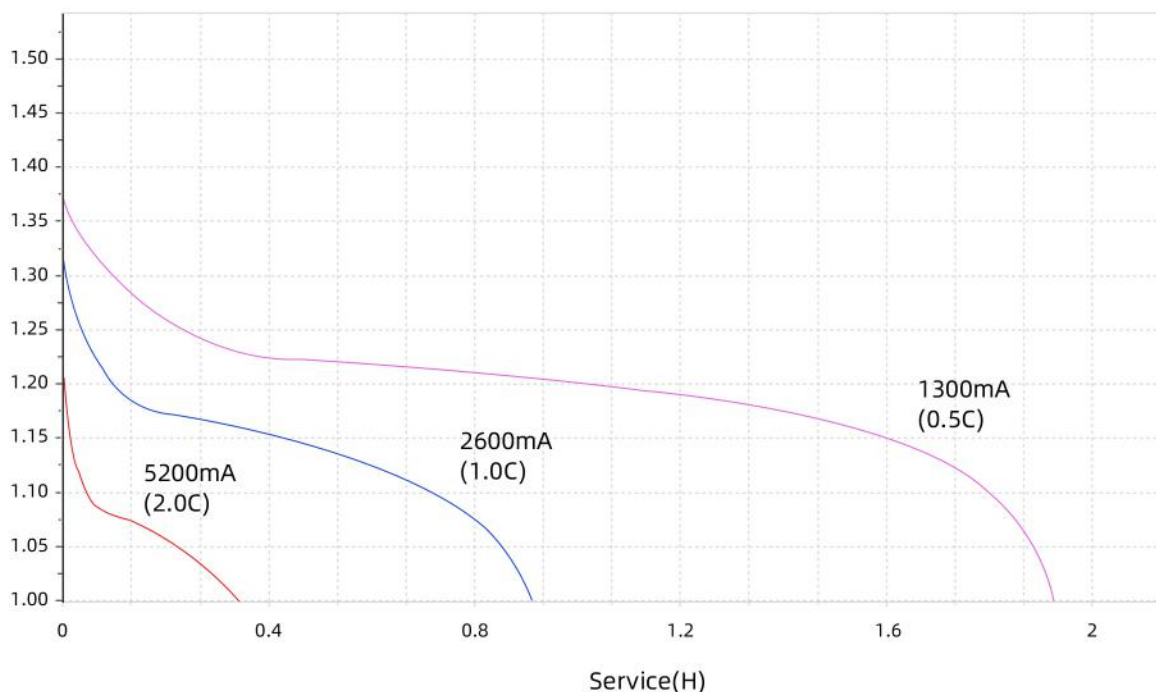

Important Notice

This data sheet contains typical information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty and are for reference only.

©XTAR - All Rights Reserved